



Description

Weflo Waterflow Detector F6001 is designed for both indoor and outdoor use. It is also equipped with tamper resistant screws to prevent unauthorized entry. The two synchronized switches are enclosed in a durable terminal block. Designed and built for accuracy and repeatability.


Features

- Flow Sensitivity Range : 4-10 GPM
- Contact Rating : 8A@123/250V, 3A@24VDC, 2.5A@30VDC
- Working Pressure : 0 °C to 68 °C
- Corrosion Protection : Fusion Bonded Epoxy, Coated Interior and Exterior or Enamel Spray Paint, Interior and Exterior
- UL Listed and FM Approved

Dimensions and Schematic

Size	L	H	Nominal Pipe Size OD	Pipe Wall Thickness
DN50	84	190	60.3	2.77 – 3.91
DN65	92	200	73	3.05 – 5.16
DN80	104	220	88.0	3.05 – 5.49
DN100	133	245	114.3	3.05 – 6.02
DN125	160	270	141.3	3.40 – 6.55
DN150	187	300	168.3	3.40 – 7.11
DN200	239	350	219.1	3.76 – 8.18

Dimension Table

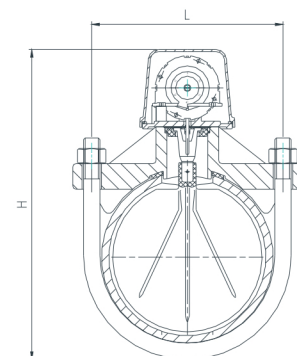

Schematic