

The AW-D135EX Manual manual call point has excellent explosion-proof performance. It is suitable for hazardous locations which include explosive gas environment.

After people confirm fire occurs and press the button of AW-D135EX , it will send the alarm signal to fire alarm panel.


The AW-D135EX has position indication and alarm indicator. It's very simple and easy to use.

The AW-D135EX can be compatible with most fire alarm control panels.




Features

- ✓ With a reset key
- ✓ Alarm indicator
- ✓ Excellent explosion-proof performance

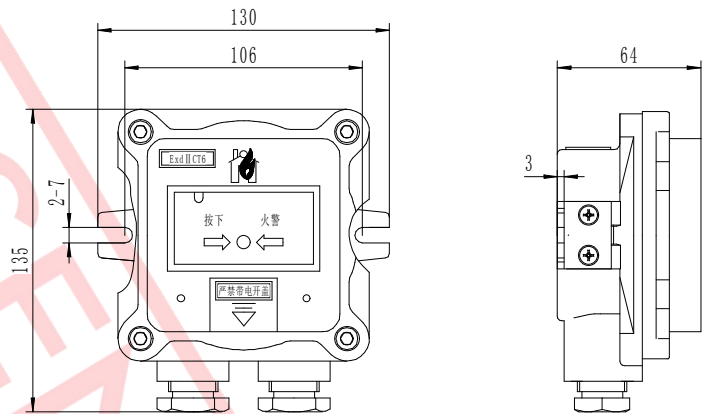

Technical Specification

Model	AW-D135EX	
Voltage	DC24V	
Alarm Current	10mA	
Indicator	Standby: Green	Alarm: Red
Alarm Out	Normal Open	
Ex-Atex Protection Level	Exd II CT6	
Mating Host	AW-CFP2166 fire alarm control panel	
Outlet Thread	G20	
Environmental	Temperature range: -20 to 50°C	
	Humidity: 5 to 95% RH, non-condensing	
Materials and colors	Cast Iron, ABS, RED	
Size	135mm* 130mm* 64mm	
Weight	about 1kg	